


FERRUM-M

UHF on-metal tag

Ferrum-M is a durable and ruggedized RFID UHF tag, compatible with the EPC Class 1 Gen 2 (ISO18000-6C) standards. It is suitable for tracking metal assets such as heavy machinery or container in harsh environment. It can very easily be fitted on to the assets using riveting screws or adhesive tapes.

It provides an extremely reliable read range up to 8m with different chip options.

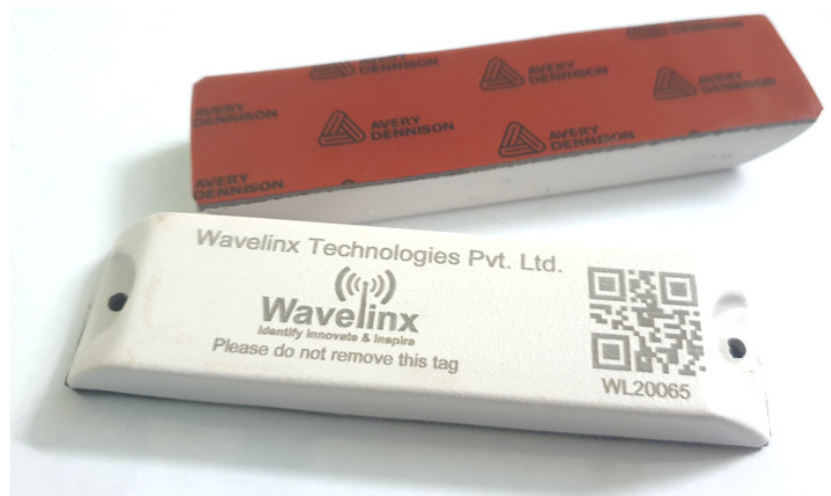

100% read-tested tags with industry best Impinj M750 / M750 chips. These tags can be customized with customer branding using laser marking or screen printing.

RECOMMENDED APPLICATIONS

Asset Tracking

Ferrum-M is designed as a long range passive RFID tag for tracking metal assets. It is very rugged (IP67) and durable making it ideal for industrial applications. Through RFID scanning, information can be received quickly and from a safe distance. WL44U is the optimal solution for your asset tracking needs in harsh environment.



Other Applications:

Container Tracking, Inventory Management, Spool Tracking in Oil and Gas.

Specifications

Part no.:	WL44U
Operating Frequency :	840-960 MHz (GLOBAL)
Operating Mode :	Passive (battery-less transponder)
Read Range :	up to 8m*
Protocol :	ISO/IEC 18000-6C
Chip Type :	Impinj M730/R6 EPC Class 1 Gen 2
Memory : (Impinj M730)	EPC 128 bits TID 48 bit unique User memory 0 bit
Data retention :	Up to 10 years
Dimensions :	100 x 24 x 10mm
Material :	ABS
Ingress Protection :	IP67
Operating Temp. :	-10°C to +65°C
Storage Temp. :	-10°C to +55°C
Colors :	Grey/White
Quality assurance :	100% read-tested
Optional services :	Logo Printing and Encoding

© 2021 Wavelinx Technologies Pvt Ltd. All rights reserved.
Third party trademarks and/or trade names used herein are the property of their respective owner(s).