

SPEEDO

UHF Windshield Tag

UHF windshield tag is used in tracking all types of vehicles and in parking management applications.

It comes with heat-sustaining thin or foam adhesive for windshield application.

Logo or text can be printed on top of the tag.

It can be custom produced in different sizes as per customer requirement.



100% read-tested tags with industry best NXP UCode 8 chip. These tags can be customized with customer branding using digital printing.

RECOMMENDED APPLICATIONS

Vehicle Tracking

Speedo is designed to be easily applied on any vehicle windshield. It comes with a heat-sustaining thin film adhesive for easy application. Through RFID scanning, information can be received quickly and from a safe distance. WL06U is the optimal solution for your vehicle tracking and parking management needs.




SECURITY ASPECT

The tag is made up of special substrate that makes it 100% tamper-evident. So, it cannot be peeled-off from the windshield without tag getting damaged.

Specifications

Part no.:	WL06U
Operating Frequency :	840-960 MHz (GLOBAL)
Operating Mode :	Passive (battery-less transponder)
Read Range :	up to 10m*
Protocol :	ISO/IEC 18000-6C
Chip Type :	NXP UCode 8 EPC Class 1 Gen 2
Memory :	EPC 128 bits TID 48 bit unique User Memory 0 bits
Data retention :	Up to 10 years
Dimensions :	105 x 26mm
Material :	Polyester with thin film adhesive
Ingress Protection :	IP54
Operating Temp. :	-10°C to +55°C
Storage Temp. :	-10°C to +45°C
Colors :	White/Blue
Quality assurance :	100% read-tested
Optional services :	Logo Printing and Encoding

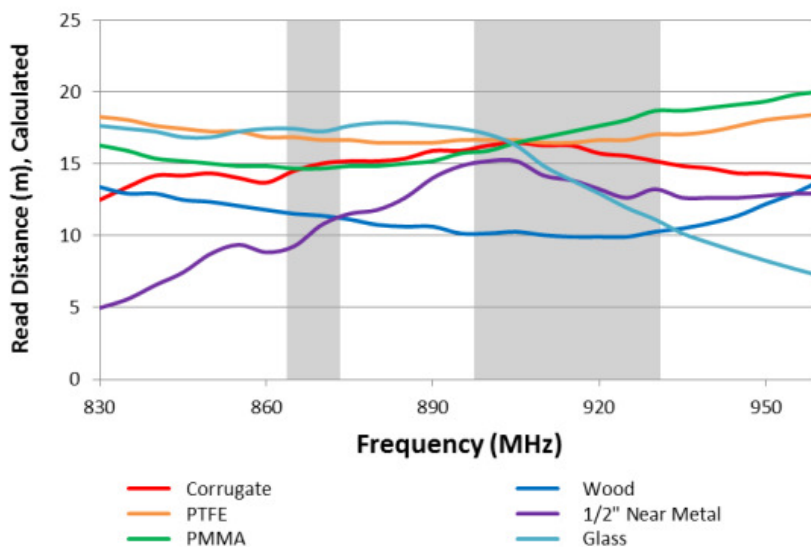

© 2021 Wavelinx Technologies Pvt Ltd. All rights reserved.
Third party trademarks and/or trade names used herein are the property of their respective owner(s).